




Heyco-Flex™ Pool and Spa Hose

For Use with PVC Solvent Weld Fittings Only

- 1/2" thru 2" trade sizes.
- Palletized, banded & stretch wrapped for easy shipping and handling.
- Easily conforms to shapes and contours making installation and plumbing layouts less time consuming.
- Integral rigid and flexible PVC construction.
- Designed to be used with schedule 40 PVC fittings.
- 5 feet “Repair Stix” Available.
- Suitable Installation For:
 - Hot Tubs “Spas”
 - Pools
- Outside diameter continuously monitored during manufacturing.
- Do not use Heyco-Flex™ pool/spa hose on In-Floor Pool cleaning systems or on Booster Pumps for APC systems.

TRADE SIZE	PART NO. White	PART DIMENSIONS				Coil Length ft/coil	Maximum Working Pressure (PSI)		Vacuum Rating (inches Hg)		Bend Radius
		A Outside Diameter		B Inside Diameter			@70°F	@140°F	@70°F	@140°F	
		in.	mm.	in.	mm.						
1/2"	HF-050-100W	.840	21,3	.600	15,2	100	100	70	28	26	2
3/4"	HF-075-100W	1.05	26,6	.800	20,3	100	100	70	28	26	2
1"	HF-100-100W	1.315	33,1	1.050	26,8	100	100	70	28	24	2
1"	HF-100-50W	1.315	33,1	1.050	26,8	50	100	70	28	24	2
1"	HF-100-5W	1.315	33,1	1.050	26,8	5	100	70	28	24	2
1-1/2"	HF-150-100W	1.90	47,8	1.605	40,7	100	100	70	28	24	5
1-1/2"	HF-150-50W	1.90	47,8	1.605	40,7	50	70	50	28	24	5
1-1/2"	HF-150-5W	1.90	47,8	1.605	40,7	5	70	50	28	24	5
2"	HF-200-100W	2.375	59,9	2.100	53,3	100	60	50	28	24	6
2"	HF-200-50W	2.375	59,9	2.100	53,3	50	60	50	28	24	6
2"	HF-200-5W	2.375	59,9	2.100	53,3	5	60	50	28	24	6

Standard Color: White.
Consult Heyco for “Cut to Length” Availability.

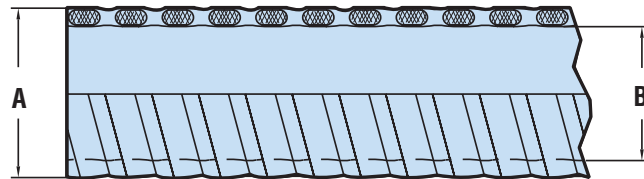

Quick Specs

Material PVC
 Certifications NSF APPROVED Listed file No.SP 3342
 FDA non-toxic formulation in compliance with IAMPO No.TSC 31-90
 Temperature Range -10°F to 140°F