




Heyco® Nylon Arrow Clips

MOUNTING HOLE DIAMETER		PANEL THICKNESS Gripping Range				PART NO.	DESCRIPTION	PART DIMENSIONS							
		Minimum		Maximum				A Length		B Clip Diameter		C Head Diameter		D Head Height	
in.	mm.	in.	mm.	in.	mm.	Natural		in.	mm.	in.	mm.	in.	mm.	in.	mm.
.118	3,0	.062	1,6	.125	3,2	0315	AC 15	.390	9,9	.150	3,8	.280	7,1	.060	1,5
.130	3,3	.125	3,2	.140	3,6	0313	AC 13	.318	8,1	.162	4,1	.280	7,1	.060	1,5
.131	3,2	.062	1,6	.125	3,2	0302	AC 2	.390	9,9	.162	4,1	.280	7,1	.060	1,5
.145	3,6	.290	7,4	.300	7,6	0314	AC 14	.530	13,5	.196	5,0	.270	6,8	.070	1,8
.151	3,8	.062	1,6	.145	3,7	0304	AC 4	.400	10,2	.180	4,6	.280	7,1	.060	1,5
.182	4,6	.062	1,6	.125	3,2	0301	AC 1	.400	10,2	.225	5,7	.360	9,1	.060	1,5
.182	4,6	.165	4,2	.187	4,7	0311	AC 11	.518	13,1	.206	5,2	.376	9,4	.060	1,5
.182	4,6	.310	7,9	.330	8,4	0306	AC 6	.550	14,0	.225	5,7	.370	9,4	.060	1,5
.213	5,4	.062	1,6	.125	3,2	0307	AC 7	.450	11,4	.220	5,6	.370	9,4	.060	1,5
.213	5,4	.125	3,2	.187	4,7	0305	AC 5	.540	13,7	.248	6,3	.370	9,4	.060	1,5
.250	6,3	.125	3,2	.187	4,7	0309	AC 9	.575	14,6	.290	7,4	.484	12,3	.060	1,5
.250	6,3	.360	9,1	.380	9,7	0316	AC 16	.810	20,6	.245	6,2	.610	15,5	.065	1,6
.320	5,8	.062	1,6	.340	8,6	0317	AC 17	.900	22,9	.375	9,5	.683	17,3	.070	1,8

Standard Color: Natural.

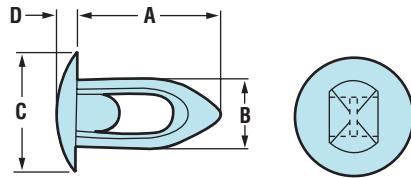


- 6/6 "Nylon" with a 94V-2 flammability rating; temperature index 125°C.
- Snaps into mounting holes with fingertip pressure—no tools required.
- Offers a low cost way to assemble metal, plastic, composite, wood, and other thin gauge materials.
- Hollow body design allows the clip to compress through the mounting hole, then expand back to original shape to lock assembled components securely.
- May be disassembled and reused.
- Vibration, abrasion, and corrosion resistant.



Heyco® Nylon Push-in Fasteners

MOUNTING HOLE DIAMETER		MAXIMUM PANEL THICKNESS		PART NO.	DESCRIPTION	PART DIMENSIONS							
						A Overall Length		B Head Diameter		C Lock Length		D Lock Diameter	
in.	mm.	in.	mm.	Natural		in.	mm.	in.	mm.	in.	mm.	in.	mm.
.093	2,4	.115	2,9	0339	PF 39	.240	6,1	.250	6,4	.085	2,2	.145	3,7
.130	3,3	.190	4,8	0342	PF 42	.320	8,1	.203	5,2	.090	2,3	.180	4,6
.165	4,2	.133	3,4	0350	PF 50	.310	7,9	.343	8,7	.137	3,5	.202	5,1
.200	5,1	.156	4,0	0360	PF 60	.359	9,1	.468	11,9	.153	3,9	.230	5,8
.200	5,1	.375	9,5	0361	PF 61	.552	14,0	.343	8,7	.137	3,5	.236	6,0

Standard Color: Natural.

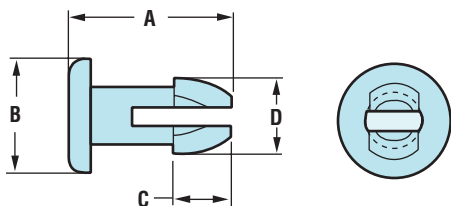

- 6/6 "Nylon" with a 94V-2 flammability rating; temperature index 125°C.
- Snaps into mounting holes with fingertip pressure—no tools required.
- Offers a low cost way to assemble metal, plastic, composite, wood, and other thin gauge materials.
- Slotted leg design allows for both compression through the mounting hole and then expansion back to original shape—to lock assembled components securely.
- May be disassembled and reused.
- Vibration, abrasion, and corrosion resistant.